


NO.P006 Connecting rPDU Power Cables to Route A

PUD-IN&OUTPUT-A QF9 Connects to rPDU-01A
PUD-IN&OUTPUT-A QF10 Connects to rPDU-02A
PUD-IN&OUTPUT-A QF11 Connects to rPDU-03A
PUD-IN&OUTPUT-A QF12 Connects to rPDU-04A
Reserved top tray for site installation

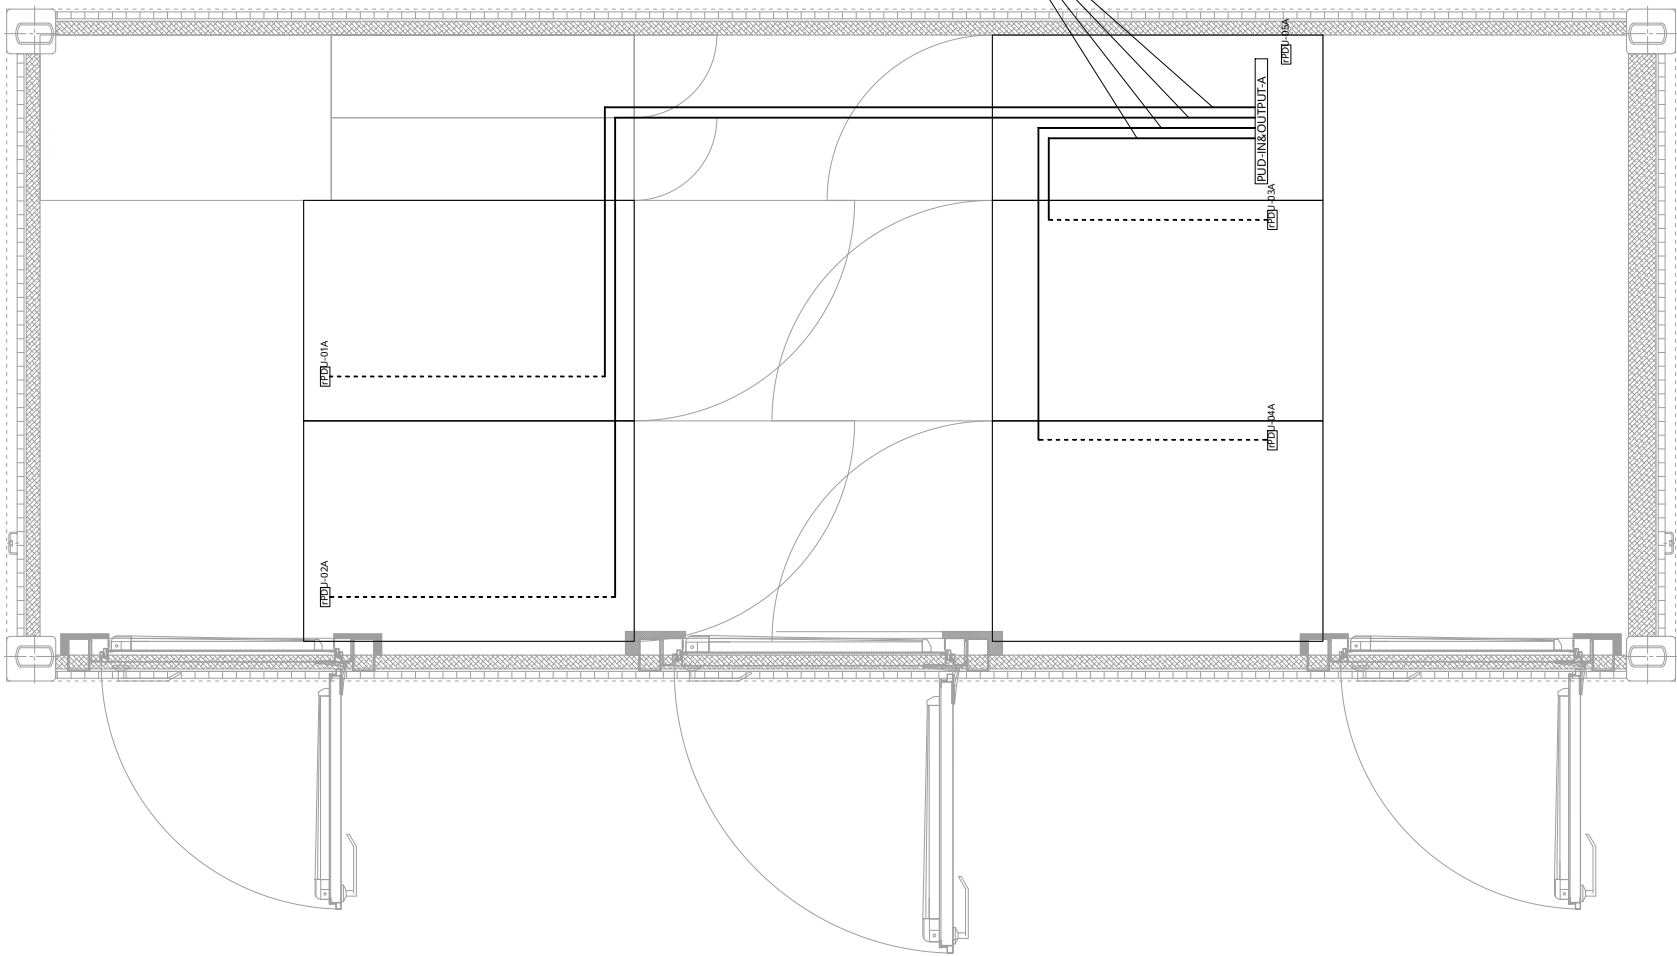

Number	Container	From Device	Container	To Device	Breaker	Huawei Part Code	Huawei Part Description	Phase	Input Terminal	Output Terminal	Remarks
1	A101	PUD-IN&OUTPUT-A QF9	A101	rPDU-01A	40A/2P	25033926	Electronic Electric Cable,600V/1000V,WDZB-YJRY,3x6mm^2,Black (Brown,Blue,Yellow/green),LSZH,CE	L/N/PE	OT6-M4	Tube 6mm^2	Use brown, blue, and greenish-yellow heat-shrink tubes at both ends of the L/N/PE cable.
						14110065	Common Terminal,Conductor Cross Section 6mm^2,Length 20mm,Insertion Depth 12mm,Black				
						14170017	Naked Crimping Terminal,OT,6mm^2,M4,Tin Plating,Insulated Ring Terminal,12~10AWG,yellow				
2	A101	PUD-IN&OUTPUT-A QF10	A101	rPDU-02A	40A/2P	25033926	Electronic Electric Cable,600V/1000V,WDZB-YJRY,3x6mm^2,Black (Brown,Blue,Yellow/green),LSZH,CE	L/N/PE	OT6-M4	Tube 6mm^2	Use brown, blue, and greenish-yellow heat-shrink tubes at both ends of the L/N/PE cable.
						14110065	Common Terminal,Conductor Cross Section 6mm^2,Length 20mm,Insertion Depth 12mm,Black				
						14170017	Naked Crimping Terminal,OT,6mm^2,M4,Tin Plating,Insulated Ring Terminal,12~10AWG,yellow				
3	A101	PUD-IN&OUTPUT-A QF11	A101	rPDU-03A	40A/2P	25033926	Electronic Electric Cable,600V/1000V,WDZB-YJRY,3x6mm^2,Black (Brown,Blue,Yellow/green),LSZH,CE	L/N/PE	OT6-M4	Tube 6mm^2	Use brown, blue, and greenish-yellow heat-shrink tubes at both ends of the L/N/PE cable.
						14110065	Common Terminal,Conductor Cross Section 6mm^2,Length 20mm,Insertion Depth 12mm,Black				
						14170017	Naked Crimping Terminal,OT,6mm^2,M4,Tin Plating,Insulated Ring Terminal,12~10AWG,yellow				
4	A101	PUD-IN&OUTPUT-A QF12	A101	rPDU-04A	40A/2P	25033926	Electronic Electric Cable,600V/1000V,WDZB-YJRY,3x6mm^2,Black (Brown,Blue,Yellow/green),LSZH,CE	L/N/PE	OT6-M4	Tube 6mm^2	Use brown, blue, and greenish-yellow heat-shrink tubes at both ends of the L/N/PE cable.
						14110065	Common Terminal,Conductor Cross Section 6mm^2,Length 20mm,Insertion Depth 12mm,Black				
						14170017	Naked Crimping Terminal,OT,6mm^2,M4,Tin Plating,Insulated Ring Terminal,12~10AWG,yellow				
5	A101	PUD-IN&OUTPUT-A QF13	A101	rPDU-05A	40A/2P	25033926	Electronic Electric Cable,600V/1000V,WDZB-YJRY,3x6mm^2,Black (Brown,Blue,Yellow/green),LSZH,CE	L/N/PE	OT6-M4	Tube 6mm^2	Use brown, blue, and greenish-yellow heat-shrink tubes at both ends of the L/N/PE cable.
						14110065	Common Terminal,Conductor Cross Section 6mm^2,Length 20mm,Insertion Depth 12mm,Black				
						14170017	Naked Crimping Terminal,OT,6mm^2,M4,Tin Plating,Insulated Ring Terminal,12~10AWG,yellow				

REVISIONS		
NO.	DESCRIPTION	DATE
NOTE:		
PROJECT		
DRAWING TITLE		
CHECKED BY /DATE		
DRAWN BY /DATE		
DESIGNED BY /DATE		
CLIENT		
SCALE	STATUS	
DATE	DRAWING NO.	